


JQ240 / 340 / 440 Filtration systems are used for:

- crusher lubrication
- gas turbine lubrication
- injection and blow moulding machine hydraulics
- systems with:
 - 150 litres tank capacity (JQ240)
 - 150-400 litres tank capacity (JQ340)
 - 400-600 litres tank capacity (JQ440)



Physical Dimensions (JQ240/340/440)	Metric	US
Height	1060 mm	42"
Depth	270 mm	10 1/2"
Width	360 / 515 / 662 mm	14 / 20 / 42"
Weight	30 / 43 / 52 kgs	66 / 95 / 115 l
Maximum Pressure	70 psi	
Rec. Operating Pressure	35 psi	

Flow Rates		JQ240		
Result Number	Line in pressure (psi)	Line out flow (L/min)	Line out flow (Gals/hour)	Line out flow (L/min)
1	20	2.70	36	2.40
2	30	3.75	50	3.50
3	40	5.50	73	5.00
4	50	6.60	88	6.60
5	60	7.50	100	8.50
6	70	8.50	113	10.00
7	80	10.00	133	12.00
8	90	12.00	160	15.00
9	100	12.00	160	15.00

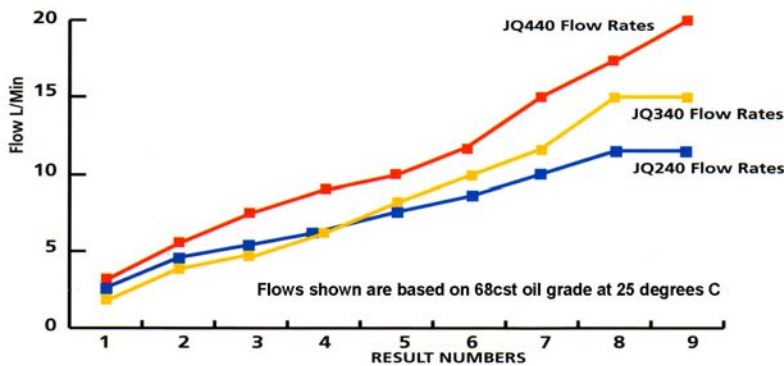

JQ240/340/440 systems include:

- 2,3 or 4 x FMO4 filters fitted to a mounting frame
- 2 x manifolds with 1/2" BSPT x 9/16" JIC nipples
- 1/4" BSPT one and 1/2" BSPT other end for inlet and outlets
- **Optional Equipment:** check valve, relief valve (set at 65 psi), 3m (10 ft) of 1/2" hose and 6m (20 ft) of 5/16" hose